

Advantages

- **Approved as Doc E compliant for conversion and new build standards**
- **Also ideal for precast and beam & block floors**

Installation Service

In addition to supply of this product CMS Acoustic Solutions offers a competitively-priced installation service anywhere in the UK. Use of our service ensures that installation is performed to the highest standards by tradesmen fully experienced in the specialist skills of fitting acoustic materials correctly. For further details contact our technical team on 01925 577711.

Description

Regupol® SoundBatten is a resilient composite batten floor system for use in property refurbishment.

Regupol® SoundBattens comprise a resilient layer pre-bonded to deep (50mm x 70mm nominal) battens.

Specification


Length	1800mm
Batten cross section	50 x 70mm
Resilient layer thickness	15mm
Impact Sound Improvement ΔL_w	20dB (measured in accordance with BS EN ISO 140-6: 1998)

Accessories

Regupol® SoundDeck Flanking Band must be used around the perimeter of floors laid with **Regupol® SoundBatten** to ensure compliance.

Installation

- Fill all voids between walls and floor.
- Ensure that the concrete floor is level and clean.
- Lay **Regupol® SoundBatten** battens at spacings recommended by the flooring board manufacturer.
- Ensure that the ends of the battens do not come into direct contact with walls.
- Ensure that any services do not bridge the resilient layer.
- Lay flooring board and butt panels tightly together.
- Install **Regupol® SoundDeck Flanking Band** around the perimeter of the flooring board to isolate floor from walls and skirtings.

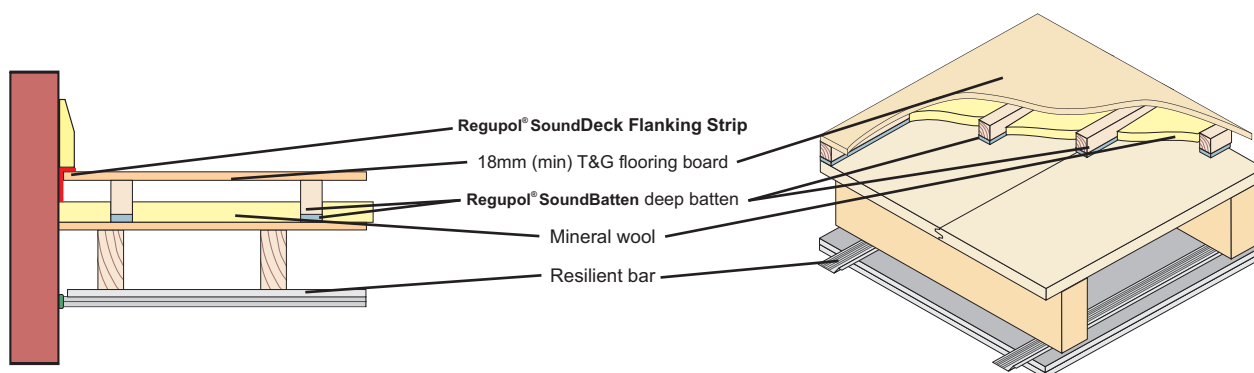

E-mail: info@cmsacoustics.co.uk

Web: www.cmsacoustics.co.uk

Northern Office: 4a, Eagle Park, Eagle Park Drive, Warrington WA2 8JA
Tel: 01925 577711 Fax: 01925 577733

Southern Office: Dugard House, Peartree Road, Colchester CO3 0UL
Tel: 01206 216690 Fax: 01206 577954

IMPORTANT: Directions for use are given for guidance only and are not intended to form part of any contract. They should be varied or adapted to suit your particular materials or conditions of use. Goods supplied by the company are made to approved standards from the highest quality raw materials but no warranty or guarantee is given as to their suitability for any particular purpose or application, and no liability is accepted for any loss or damage arising directly or indirectly from the use of the Company's products irrespective of any information given to us as to intended use of such products. It is therefore recommended that prospective users should test a sample of this product under their own conditions to satisfy themselves that the product is suitable for the purpose intended.