

Advantages


- **Approved as Doc E compliant for conversion and new build standards**
- **Also ideal for precast and beam & block floors**
- **Minimises construction height**

Installation Service

In addition to supply of this product CMS Acoustic Solutions offers a competitively-priced installation service anywhere in the UK. Use of our service ensures that installation is performed to the highest standards by tradesmen fully experienced in the specialist skills of fitting acoustic materials correctly. For further details contact our technical team on 01925 577711.

Example

Airborne sound insulation ($D_{nT,w} + C_{tr}$)	56dB
Impact sound insulation ($L'_{nT,w} (C_i)$)	47dB

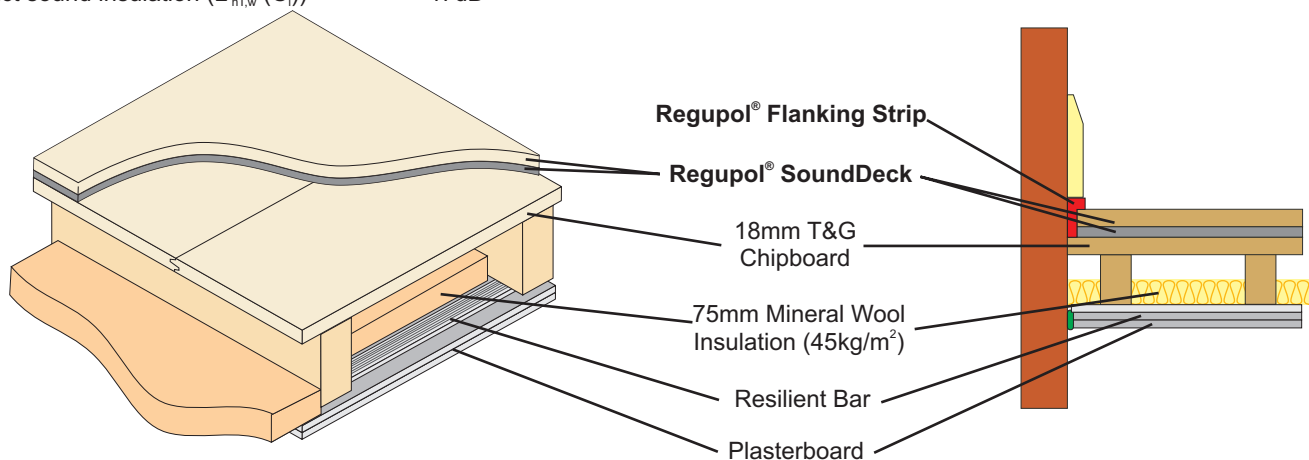

Description

Regupol® SoundDeck is a resilient overlay shallow platform floor system designed to reduce impact sound in the refurbishment of properties.

Regupol® SoundDeck panels comprise a resilient layer pre-bonded to 18mm or 22mm T & G flooring grade chipboard.

Specification

Size:	2400mm x 600mm TG4
Thickness:	26mm or 30mm

Accessories

Regupol® SoundDeck Flanking Band must be used with **Regupol® SoundDeck** to ensure efficient operation.

Installation

- 1) Ensure that floors are level and clean.
- 2) Ensure there are no protruding nail/screw heads in floor.
- 3) Fill all voids between walls and floor.
- 4) Butt **Regupol® SoundDeck** boards tightly together.
- 5) Install **Regupol® SoundDeck** flanking band around the perimeter of the floor to isolate flooring boards from walls and skirtings.