

Advantages

- Available in sheet or roll form.
- Flexible and easily cut.
- Easy to handle and install.
- Available in varying weights to suit application.
- Provides a cost effective sound barrier solution.
- Available with self-adhesive backing or Class 'O' foil facing.

Applications

CMS WB-EPDM/BS barrier material can be used as either a single sound barrier layer such as a noise curtain, or as part of a composite combined with sound absorbing materials such as mineral wool or foam for soundproofing mats. It is commonly utilised in roof, floor and wall sound reduction applications to reduce transmission of airborne and impact noise. It is also used as a sound barrier / barrier outer wrap for pipeline applications.

Description

CMS WB-EPDM/BS barrier is a high-density thermoplastic elastomeric material composed of a blend of EPDM polymers compounded with barium sulphate for high mass enhancement. Dark grey/black in colour, ecologically neutral and recyclable; the material is bitumen free.

Technical Information

CMS WB-EPDM/BS barrier material conforms to the following specifications:

Flammability (FMVSS 302)	Mod 4
Tensile strength (BS2782: Pt3: 1976)	5.75N/mm ²
Elongation at break (BS2782: Pt3: 1976)	100%
Hardness (Shore A) -	87°
Service temperature -	< 90°C (continuous)
	< 120°C (short periods)
	> -30°C
Shelf Life	Indefinite in cool dark conditions

Physical Information

Dimensions

Standard sheet size: 2m x 1.2m

Also available in cut to size sheets and in rolls to suit requirements. Maximum width available is 2m.

Weights

CMS WB-EPDM/BS barrier material is available in three standard weights:

Type*	Thickness (mm)	Weight (kg/m ²)**
WB-EPDM5 (Rw 26, SRI 23)	2.0	5.0
WB-EPDM7.5 (Rw 30, SRI 27)	3.7	7.5
WB10-EPDM10 (Rw 33, SRI 30)	5.0	10.0

*Other types and weights are available upon request.

**Nominal weights


CMS WB-EPDM/BS barrier material is a high performance material that has been acoustically tested at a UKAS certified independent test laboratory.

Tested and Rated according to: BS EN ISO 717-1:1997
BS EN ISO 140-3:1995
BS EN ISO 2750:Part3:1995

Transmission Loss Data

Material \ Frequency	63	125	250	500	1k	2k	4k	8k
WB-EPDM/BS 5	19	14	18	22	27	32	38	44
WB-EPDM/BS 7.5	21	18	22	26	31	36	42	49
WB-EPDM/BS 10	22	20	24	28	33	39	44	50

Transmission Loss Data(cont)

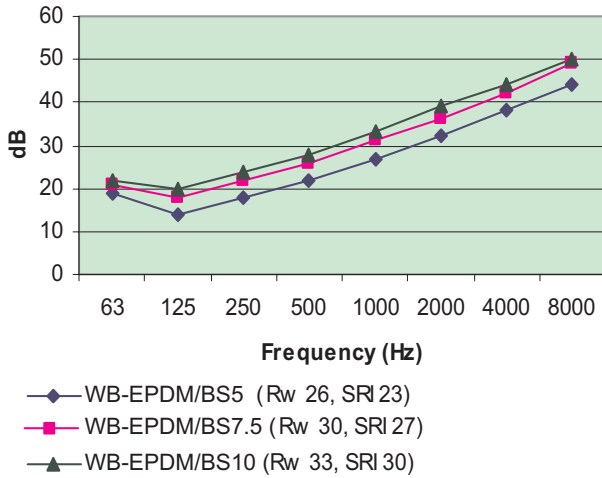

Installation Guidelines

CMS WB-EPDM/BS barrier is simple to install either direct to the noise source or in conjunction with a spaced layer; the product can be laid directly.

The barrier can be fixed in place by mechanical means i.e. pins, hangers or banding, or bonding using a polyurethane based contact adhesive (CMS type A7153). Alternatively a solvent based acrylic pressure sensitive adhesive (CMS type A419).

For CMS WB-EPDM/BS barrier material supplied with a self-adhesive backing, it is important to ensure that the surface is clean and free from dust and grease. After aligning the barrier material, peel back the release paper and adhere to the surface. Note, self-adhesive versions should not be relied on as the only method of support when fixing in a vertical or inverted position and additional mechanical means of support must be employed.

Installation Service

In addition to supply of this product CMS Acoustic Solutions offers a competitively-priced installation service anywhere in the UK. Use of our service ensures that installation is performed to the highest standards by tradesmen fully experienced in the specialist skills of fitting acoustic materials correctly. For further details contact our technical team on 01925 577711.

E-mail: info@cmsacoustics.co.uk

Web: www.cmsacoustics.co.uk

Northern Office: 11a, Eagle Park, Eagle Park Drive, Warrington WA2 8JA

Tel: 01925 577711 Fax: 01925 577733

Southern Office: 2 Luard Way, Birch, Colchester, Essex CO2 0LR

Tel: 01206 330810 Fax: 01206 330830

IMPORTANT: Directions for use are given for guidance only and are not intended to form part of any contract. They should be varied or adapted to suit your particular materials or conditions of use. Goods supplied by the company are made to approved standards from the highest quality raw materials but no warranty or guarantee is given as to their suitability for any particular purpose or application, and no liability is accepted for any loss or damage arising directly or indirectly from the use of the Company's products irrespective of any information given to us as to intended use of such products. It is therefore recommended that prospective users should test a sample of this product under their own conditions to satisfy themselves that the product is suitable for the purpose intended.

CADS 3001 - 1 0904 © CMS Acoustic Solutions Ltd 2004